

Silencer

Ordering Information


- When ordering, specify material, gauge (if non-standard), dimension and end style.
- Reduces sound levels from fans and equipment. Due to varying applications, no decibel testing has been performed on this product.
- Air flow directional arrow sticker is attached to product.



Ø in.	B OD in.	C Length in.	D (QF) in.	D (AFL/FLL) in.	Std Weight Lbs		
3	11	28	3.5		10		
4	12	28			21		
5	13	28			35		
6	14	30			43		
7	15	30			54		
8	16	35			65		
9	17	40			76		
10	18	48			89		
11	19	54			96		
12	20	54			104		
13	21	60			113		
14	22	60			122		
15	23	64			2		149
16	24						176
17	25		201				
18	26		225				
19	27		245				
20	28		265				
21	29		288				
22	30		310				
23	31		358				
24	32		406				
26	34	68	N/A	4	546		
28	36				600		
30	38				678		
32	40				700		
34	42				770		
36	44				897		
38	46				974		
40	48				1118		

QF Material Options

Galv				SS			
Gauges	Size (in)		Gauges	Size (in)			
	Min. Ø	Max. Ø		Min. Ø	Max. Ø		
Standard	20	3	16	20	3	16	
	16	17	40	16	17	40	

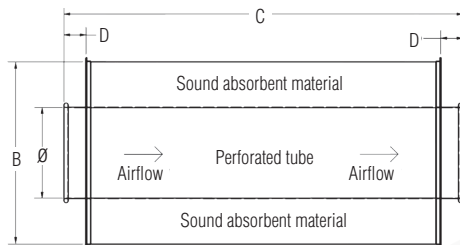

Flanged Material Options

Galv				SS			
Gauges	Size (in)		Gauges	Size (in)			
	Min. Ø	Max. Ø		Min. Ø	Max. Ø		
Standard	20	3	16	20	3	16	
	16	17	40	16	17	40	

Construction

Collars: Caulked and painted.

Outer Tube: On 16" diameter pipe and all smaller sizes, longitudinal seam is laser welded. On 17" and greater, seam is plasma welded.

Optional End Styles: Standard QF end can be changed to Raw ID (RI), Raw OD (RO), No Fitting (NF), Hose Adapter (RF), Flat Flange (FLL), Angle Flange (AFL), or Van Stone (VS).