


Quick-Fit® Sleeve with O-Ring


Ordering Information

- Used to provide variable length adjustment of QF System. Each QF pipe section is 5 ft. in length. To accommodate an existing span of less than 5', a sleeve is used to shorten. Formerly known as Adjustable Nipple.
- Solid welded seams prevent leakage.
- Nitrile (black) O-ring included standard.
- Specify Silicone (red) O-ring (high temp rating) if needed (additional cost). Replace on-site.



Construction

Longitudinal seam is laser welded.

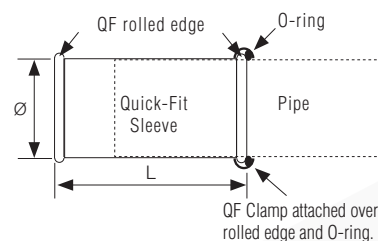

Ø in.	ID in.	OD in.	Rolled Edge (nom in.)	L in.	Weight Lbs
3	3.16	3.15	0.2	11.250	0.80
4	3.96	4.03	0.2	11.375	1.05
5	4.96	5.03	0.2	11.375	1.30
6	5.99	6.06	0.2	11.375	1.60
7	7.00	7.07	0.3	11.125	2.40
8	8.00	8.06	0.3	11.125	2.70
9	9.00	9.06	0.3	11.125	3.05
10	10.00	10.07	0.3	11.125	3.40
11	11.12	11.19	0.3	11.125	3.80
12	12.11	12.17	0.4	10.875	4.20
13	13.12	13.20	0.4	10.875	4.70
14	14.10	14.18	0.4	10.875	5.85
15	15.12	15.20	0.4	10.875	6.25
16	16.10	16.18	0.4	10.875	6.65
17	17.07	17.15	0.4	10.875	7.45
18	18.10	18.18	0.4	10.875	7.45
19	19.13	19.21	0.4	10.875	8.10
20	20.10	20.18	0.4	10.875	8.80
21	21.25	21.33	0.4	10.875	9.70
22	22.11	22.19	0.4	10.875	8.10
23	23.13	23.21	0.4	10.875	8.80
24	24.06	24.14	0.4	10.875	9.70

QF Material Options


Galv				SS			
Gauges		Size (inches)		Gauges		Size (inches)	
		Min. Ø	Max. Ø			Min. Ø	Max. Ø
Standard	22	3	12	Standard	22	3	12
	20	13	24		20	13	24
Optional	18	4	24				

The Quick-Fit Sleeve provides an easy way to adjust in areas where you need straight duct sections shorter than 5'.

1 Quick-Fit Sleeve Installation Instructions



Measure distance to be spanned.

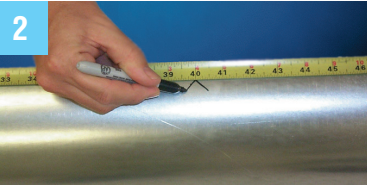


On a Pipe, mark distance to be spanned less 4".



Use provided O-ring to mark for cut.




Drill access hole, then cut Pipe with saw.

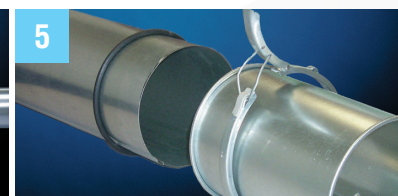

Place O-ring on the cut pipe and slide a Quick-Fit Sleeve over the cut piece.



Snap QF Clamp over O-ring and one end of Quick-Fit Sleeve.


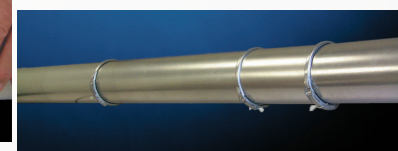


Finished connection with the Quick-Fit Sleeve

O-Ring for Quick-Fit Sleeve

Ordering Information

- Replacement O-ring for use with Quick-Fit Sleeve.
- Specify Black for standard applications.
- Specify Red for FDA or high temp material. Higher quantities may require 7 - 10 working days lead time.



Ø ID in.	Cord Ø mm	Weight Lbs
3	7	0.01
4	7	0.02
5	7	0.03
6	7	0.04
7	9	0.08
8	9	0.09
9	9	0.10
10	9	0.11
11	9	0.17
12	11	0.22
13	11	0.23
14	11	0.25
15	11	0.26
16	11	0.27
17	11	0.28
18	11	0.29
20	11	0.30
22	11	0.31
24	11	0.33

NOTE: POSITION CUT PIPE IN THE SAME DIRECTION AS THE AIRFLOW.