


## Suction Hood

### Ordering Information

- When ordering, specify material, gauge (if non-standard), size, dimensions for each pickup (hood can be constructed with any number of pickups from 2 to 6), and either Round or Rectangular openings.

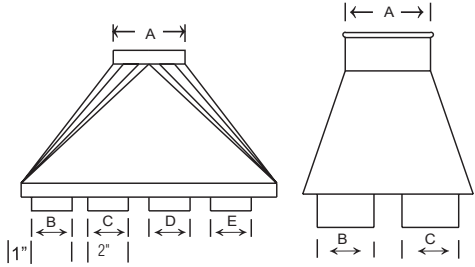

#### Construction:

**Seam:** spot welded and caulked.

**Collars:** have a laser welded longitudinal seam. Collars are attached to the body using a raised hemmed, spot welded seamed construction.

#### Optional End Styles

Standard QF end can be changed to Raw ID (RI), Raw OD (RO), No Fitting (NF), Flat Flange (FFL), Angle Flange (AFL), or Van Stone (VS).